



Installation requirements



Plumbing


There are 2 plumbing configurations, mains fill and tanked supply:

1: Mains fill



The mains option requires a cold drinking water supply within 2m. This should be from an accessible, non return, water shut off tap fitted with a 1/2" BSP male fitting. 2m of John Guest water line is supplied which is cut as needed for the supply to the machine.

2: Tank fill

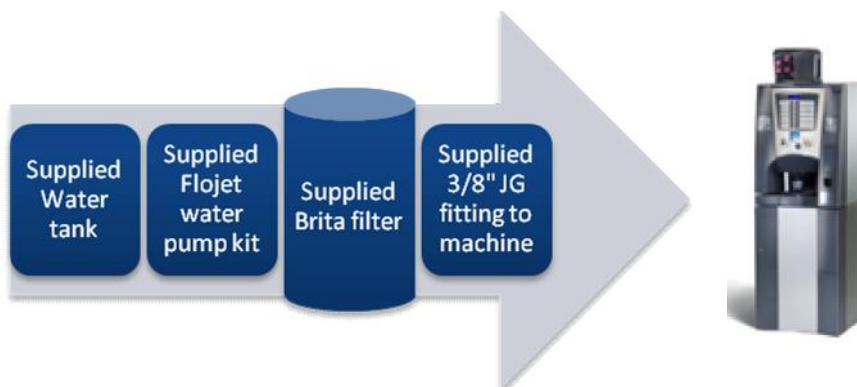

The tank option needs only electrical power; tank and plumbing fittings are fitted ready for use.

Electrical

The only electrical requirement is for a 10A switched socket to be within 2m of the machine location



TECHNICAL SPECIFICATIONS

Height	mm	760
Height with container	mm	980
Width	mm	540
Depth	mm	585
Overall depth with door open	mm	1000
Weight	Kg	65
Power supply voltage	V~	230
Power supply frequency	Hz	50
Installed power	W	1350

